

Drycleaner - Air and Waste Compliance Guide

General Air Permit to do list:


- Conduct and record weekly leak checks (with leak detector) on machine components and waste storage areas.
- Record and maintain 12-month rolling total of perc purchased for the month.
- Weekly record refrigerated condenser inlet and outlet gas vapor temperature difference.
- Record dates of parts ordered, received and repaired.
- Maintain and adhere to startup, shutdown and malfunction plan (equipment operation manual).
- Renew Air General Permit 30 days before (date) _____
- Electronic application at DEP business Portal: <http://www.fldepportal.com/go/>

Hazardous Waste and Record-keeping Requirements:


- SQG containers must be dated, inspected weekly and labeled.
- All perc purchase receipts, waste manifests and record-keeping documents (Air Compliance Calendar) must be kept on-site for a minimum of 5 years and be available for inspection at all times.
- A startup, shutdown and malfunction plan and/or a copy of the operating manuals for each dry-cleaning system and emission control device must be kept at the facility.
- Post current year's Waste Management Certificate of Registration.



← Separator Water should be accumulated in a closed, labeled container, located within secondary containment.

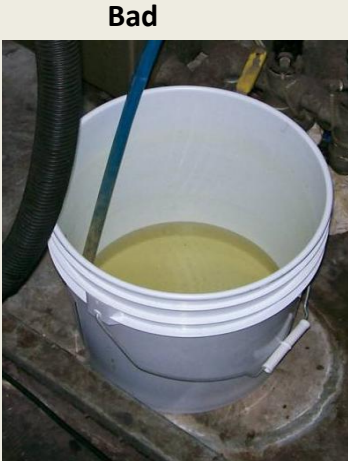

↓ Floors around the **Drycleaning Machine** and **Spotting Board** should be sealed with an impervious sealant extending 2 feet unless machine is in secondary containment.

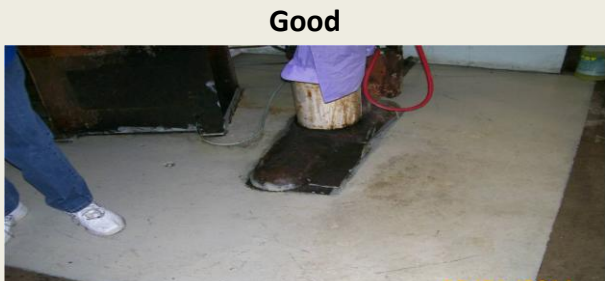

↓ Spotting Chemicals should be stored within secondary containment.



↓ Filters and Lint should be stored in closed, labeled containers, located within secondary containment.



Florida Department of Environmental Protection

Hazardous Waste Regulation -850.245.8707 General Air Permit -850.717.9095

<http://www.floridadep.org/waste/categories/drycleaning/default.htm>

DISCLAIMER: This poster is for guidance purposes only. It is not official rule language and does not include a comprehensive listing of all environmental regulations that may be applicable to drycleaners.

