


TYPICAL MUNICIPAL WELL CONSTRUCTION

DEPTHS AND HYDROGEOLOGY ARE TYPICAL FOR SOUTHEAST FLORIDA

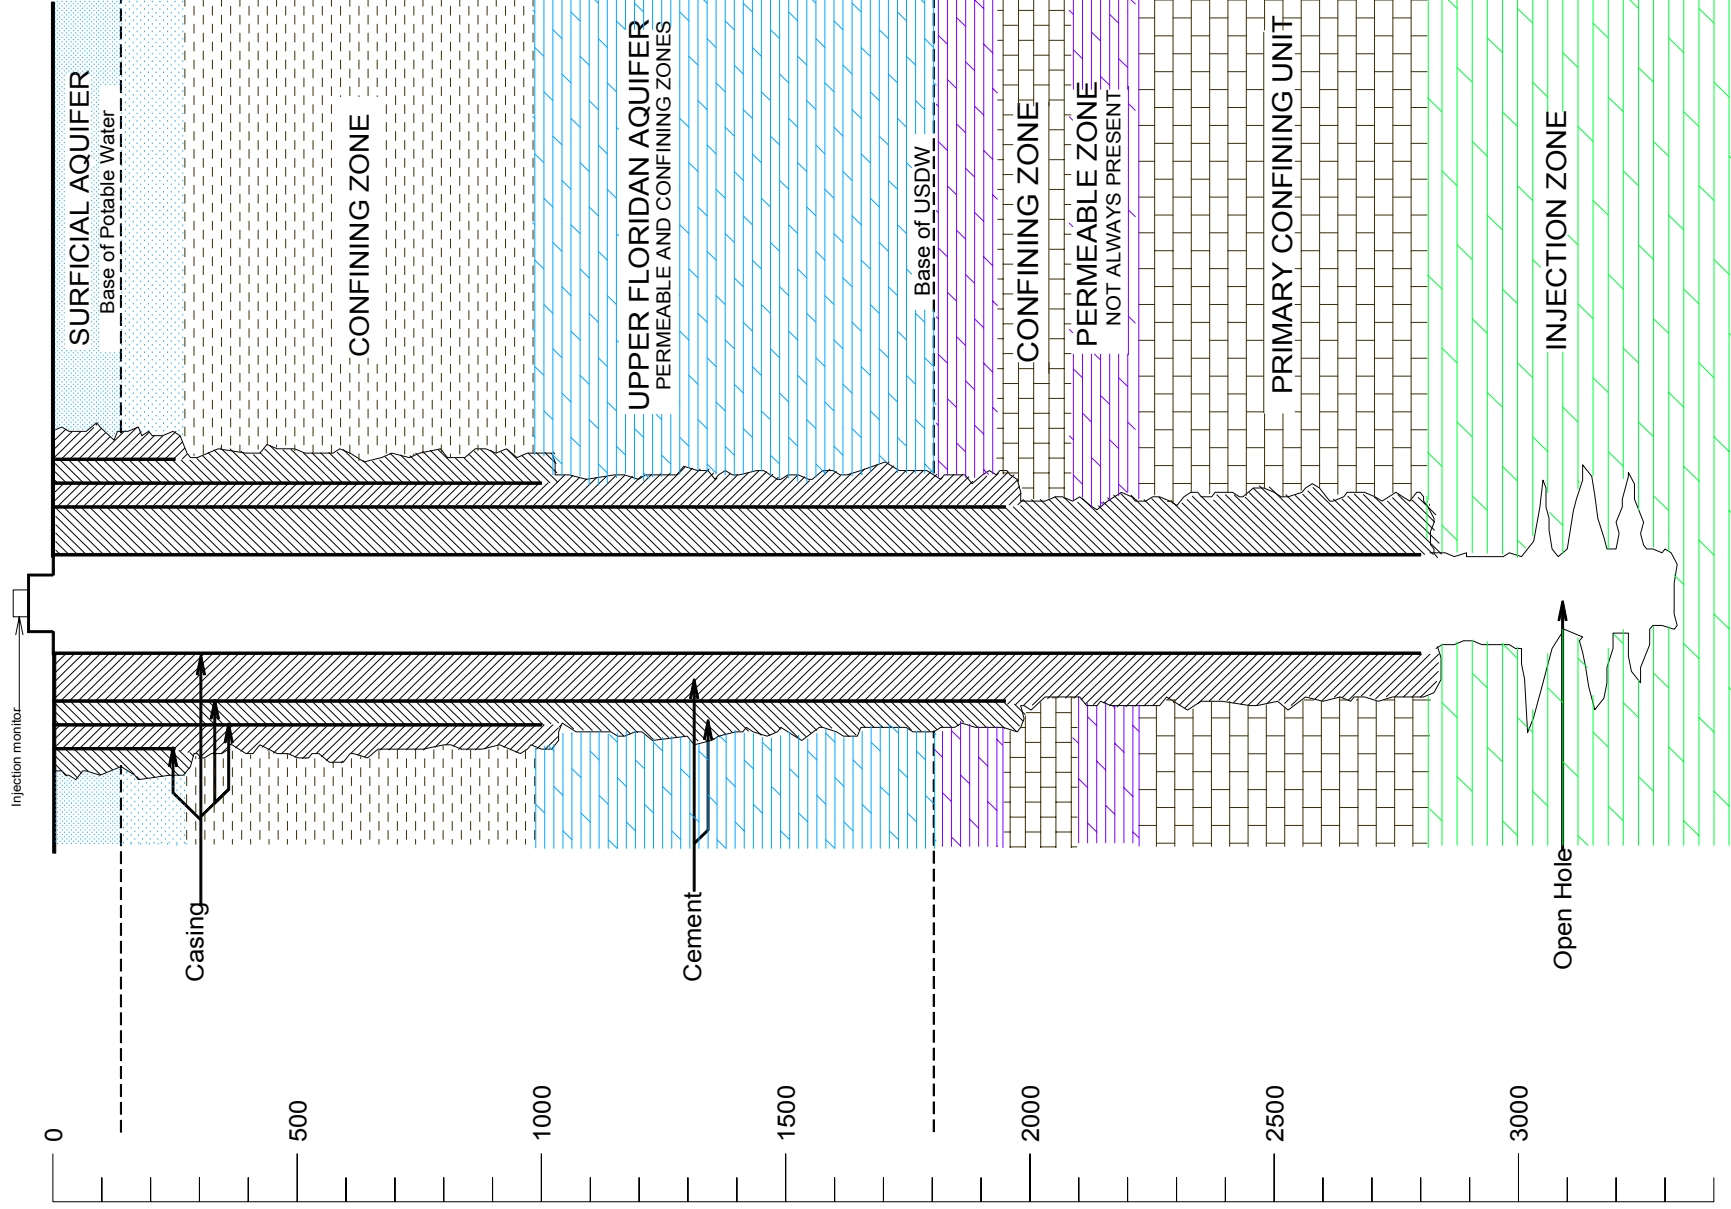

Notes:

Casing	Outside Diameter	Wall Thickness	Typical Length	Material
Surface	52-inch	3/8-inch	100-250 ft.	Steel
Shallow Intermediate	42-inch	3/8-inch	900-1000 ft.	Steel
Deep Intermediate*	34-inch	3/8-inch	1500-2100 ft.	Steel
Injection	24-inch	1/2-inch	2400-3000 ft.	Seamless Steel

*The deep intermediate casing is set below the base of the lowermost underground source of drinking water
Casing depths apply only to southeast Florida.